HAMANN

High Quality Sewage Treatment Plants

certified according to MEPC.227(64)

HL-CONT Plus

- Compact and light in weight
- Neither membranes nor filters
- Modular design
- Made in Germany
- Proven technology
- Hardly any maintenance
- Clean hands for operators
- Also available in NAVY execution



Supported by:




on the basis of a decision by the German Bundestag The process / technical description of the **HL-CONT Plus** is based on physical treatment.

Maceration of sewage

 Dissolved air flotation for the reduction of TSS, BOD and COD

UV disinfection

All sewage needs to be collected in one ship's holding tank. Depending on the calculated load and number of persons the tank must have a sufficient size as the working volume between high level

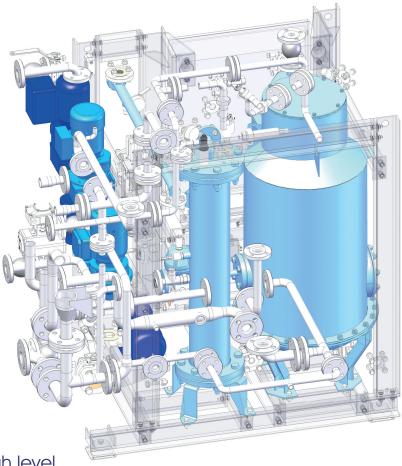

and stop plant is one important issue for the **HL-CONT Plus**.

HL-CONT	Capacity [litre/day]	Persons onboard calculated with 135 I / day	Persons onboard calculated with 1801/ day	Size WxLxH [m]	Empty Weight [kg]	Electrical Consumption	Vent Connection
0125	3.000	22	16	0.8 x 0.9 x 0.9	165	2.1 kW	1/2"
025	6.000	44	33	0.9 x 1.2 x 0.9	315	2.3 kW	1"
05	12.000	88	66	1.0 x 1.3 x 1.4	680	2.6 kW	1"
10	24.000	177	133	1.2 x 1.6 x 1.8	820	3.5 kW	1"
20	48.000	355	266	1.6 x 2.1 x 2.1	1450	5.2 kW	1"
40	96.000	711	533	2.3 x 2.5 x 2.3	1900	8.5 kW	1"
80	192.000	1422	1066	2.1 x 4.7 x 2.7	4700	15.0 kW	2"

www.HAMANNAG.com



Bei der Lehmkuhle 4 D-21279 Hollenstedt / Germany Phone: +49 / 4165 / 22 11- 0 Fax: +49 / 4165 / 22 11 25 E-mail: sales@hamannag.com